


Oceanair are on hand for assistance at every stage of the application, from consultant design through to end user control demonstrations and even warranty management.

Whatever stage of the process you require assistance with, however large or small our knowledgeable and friendly staff are here to help, providing you with the support and services you need to ensure a smooth and trouble free application.

Offering the flexibility to hand pick any stage of the process that suits your particular requirement, ensures that you maintain control whilst utilising our vast industry knowledge, excellent product offering and after sales support.

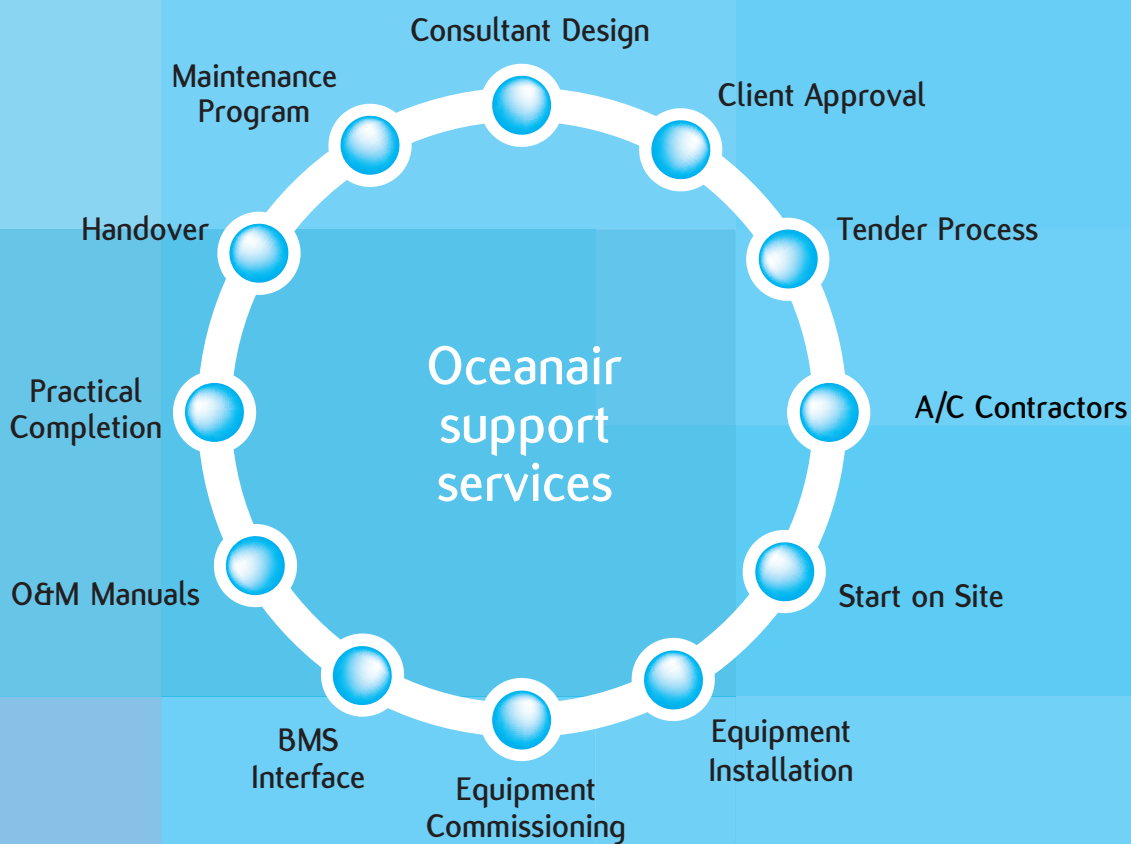

On hand to provide assistance with any or all of the following services, from design stage through to heat load calculation, controls integration and commissioning, we are at your service.

Consultant Design

- Initial design
- Pipe work schematics
- Control strategy
- Wiring diagrams
- Equipment schedules
- Client site visit or equipment demonstration
- Running cost evaluation
- Carbon performance calculations
- Sound spectrums provision for accousticians

Client Approval

Tender Process

A/C Contractors

- Preparation of quotations and liason with potential installers

Start on Site

- Delivery liason to meet program schedules
- Installer liason to ensure correct installation

Equipment Installation

- Confirm pipe work schematics to Fit Site pipe routes
- Pre commissioning check list
- Ensure correct mains supply voltage is permanently available
- Accurate measurements and recording of liquid line pipe work
- Assessment of site access security requirements
- Pressure testing and witnessing of refrigeration system pipe work to 30 bar
- Triple evacuation of system pipe work, held on a vacuum of 5mbar or 3 Torr

Equipment Commissioning

- Each VRF system commissioned seperately and all sensor readings recorded via laptop service checker
- Heating and cooling operations confirmed at full and part load conditions
- Fan coil addresses marked up on as installed drawings
- System group addresses marked up on controller schedule

BMS Interface

- Liason with specialist controls supplier for building management interface

O&M Manuals

- Preperation of documentation for client O&M manuals
- Print off of all commissioning data provided for O&M manual

Practical Completion

- Walk through with consultant to demonstrate operation of equipment

Handover

- End user control demonstration

Maintenance Program

- Warranty management to ensure the client sees the full benefit of the manufacturer warranty



Call us today for more information on how Oceanair can assist with your air conditioning requirements.

Nottingham

Ocean Air (UK) Ltd
Unit K4 Prospect Close
Lowmoor Business Park
Kirkby in Ashfield
Nottinghamshire NG17 7LF

Email: email@oceanair.uk.net
Tel: 01623 727414
Fax: 01623 727419

Sussex

Ocean Air Distribution Ltd
Unit 3 Burns Way
Holmbush Potteries Estate
Faygate Horsham
West Sussex RH12 4ST

Email: support@oceanair.uk.com
Tel: 01293 852550
Fax: 01293 852551